

# ▶ Red5 Series


## Red5-PLUS-1146

### Description

Get faster processing speed, increased memory, and secure, scalable IoT connectivity with our new line of Red5 controllers.

As a fully programmable IoT system controller, the Red5-PLUS-1146 supports a wide range of applications, from system-level control to unitary control, with onboard and modular I/O options providing added flexibility over previous generations.

Using the Proviso app, you can adjust network settings, view sensor data, and calibrate sensors via NFC or Bluetooth. In addition, the Red5 allows for custom IoT applications, opening up new possibilities for the smart buildings of tomorrow.

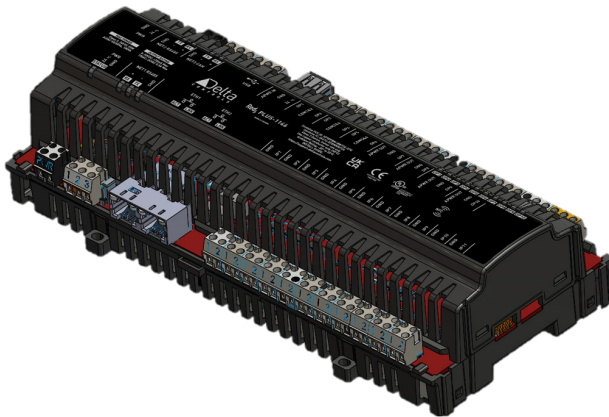

### Application

Building on the legacy of the DAC/DSC, the Red5 system combines HVAC, access control, and lighting control in a modular system, with multiple controls and I/O points in one unit.

With workflow improvements, I/O expandability, and IoT connectivity, Red5 provides seamless integration and a better occupant experience at a lower energy cost.

### Features

- ▶ Fully programmable using GCL+
- ▶ Dual Ethernet ports
- ▶ Bluetooth (BLE 5.0) and NFC connection
- ▶ Supports CAN modules for expansion
- ▶ Firmware upgrade and database load/save over the network
- ▶ Advanced fault detection and diagnostics
- ▶ 2 USB ports
- ▶ DIN rail mountable
- ▶ LED light pipe indicator for each output, power, CPU and SCAN status

### Specifications

#### BACnet Device Profile

BACnet Building Controller (B-BC)

#### Inputs

11 universal inputs (16-bit), supporting:  
0–5 VDC  
0–10 VDC  
10 kΩ thermistor  
4–20 mA

#### Outputs

4 analog outputs

6 binary TRIAC outputs (jumper configured for internal or external power)

#### Device Addressing

Software addressed

#### Connectors

Removable screw-type terminal connectors

#### Wiring Class

Class 2 / SELV


#### Power

24 VDC (20 W max)  
24 VAC (50 VA, 100 VA max with fully-loaded, internally powered triac outputs)

Published January 2023

# Red5 Series

## Red5-PLUS-1146

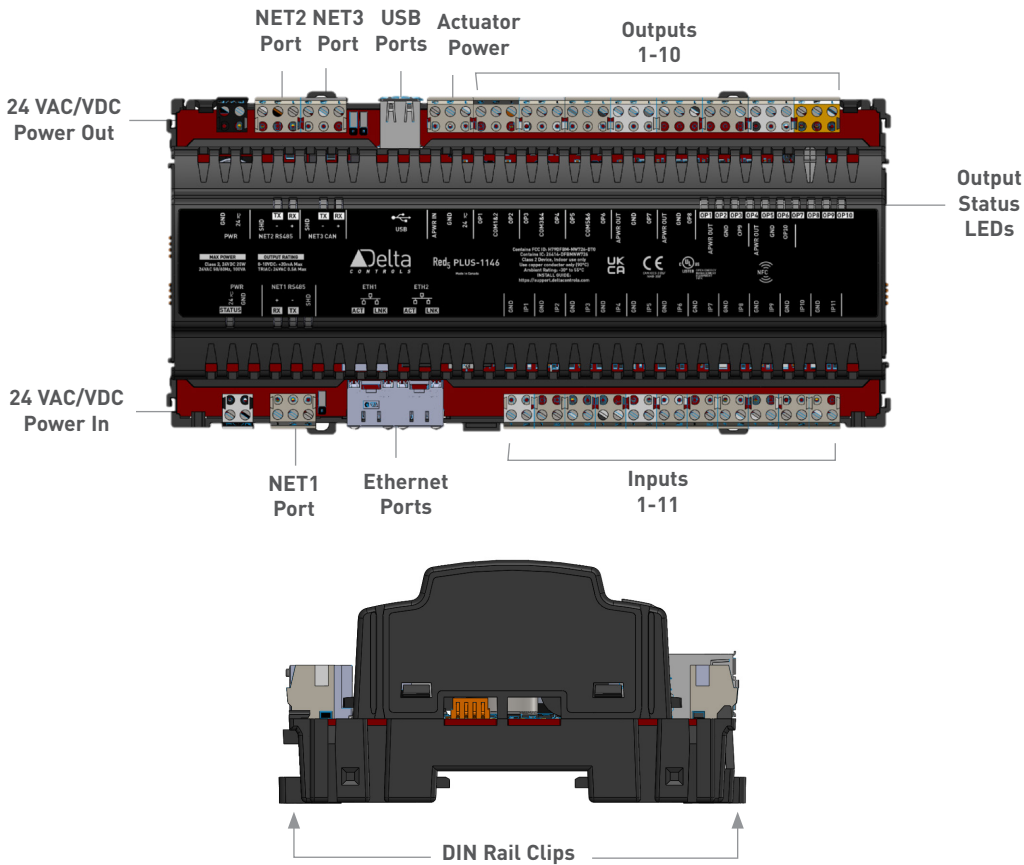

### Specifications (Continued)

#### Technology

32-bit ARM processor  
512 MB RAM  
8 GB flash memory  
24.4 KB GCL+ PG size  
20 MB database space

#### Communications Ports

2 Ethernet (10/100-Base T)  
BACnet/IP, BACnet over Ethernet,  
BACnet/SC, BBMD

3 RS-485 ports supporting:

NET1, NET2:

BACnet MS/TP up to 76800 bps  
Delta LINKnet up to 76800 bps, max  
12 devices with no more  
than 2 DFMs (1 port only)  
Modbus RTU up to max 5 devices (1  
port only)

NET3:

CAN bus only port

2 USB ports

Bluetooth (BLE 5.0)

NFC

#### Ambient Rating

-30°C to 55°C (-22°F to 131°F)  
10% to 95% RH (non-condensing)

#### Dimensions

252 x 112 x 58 mm  
(9.9 x 4.41 x 2.28 in.)

#### Weight

488 g (1.08 lb) with housing

#### Compliance

CE  
FCC  
EAC

#### Listings

cULus 916 Listed  
UKCA Listed

### Ordering

Order the Red5-PLUS-1146 with one or more modules or hubs:

Red5-PLUS-1146	Base unit: 3 networks ports, 2 Ethernet ports, 2 USB ports, 11 inputs, 10 outputs
----------------	---

### Accessories

Red5-BACKUP	Super-cap database backup on power fail
-------------	---



Subject to change without notice.